

T SERIES




EM POWER
LEADS
THE WAY



Designed for skid steer loader and Multifunction RC remote controlled by CM, with the purpose to cut and make narrow trenches, set-section trenches, mini- and micro-trenches for fiber optic cable installation. It works on different surfaces such as asphalt, cement and rock.

STRENGTHS

- Constant trench depth
- Clean trench
- High cutting force
- Structure designed to work on hard or compact surfaces
- Hydraulic depth adjustment as standard
- Easy and uncomplicated maintenance

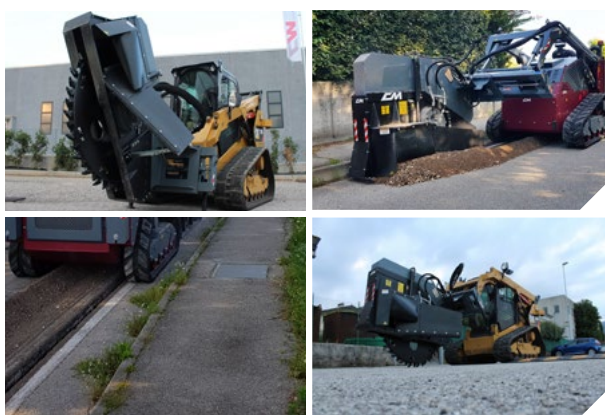

Canalization /
Sobsoil



Demolitions



Construction industry



Tunnels /
Enclosed spaces



Agricultural / Forest
maintenance



Recycling



Fiber line



Road works

DATA SHEET		T 450	T 600
Trench width	mm	min 75 max 150	min 75 max 150
Trench depth	mm	max 450	max 600
Weight	kg	1000	1300
Standard rock teeth	n.	42	56
Oil flow	l/min	120	120
Pressure	bar	300	300
Trench clearing device		opt.	opt.
Depth adjustment		Hydraulic as standard	
Side shift		Hydraulic as standard	

Weights and dimensions could vary without notice. Weight does not include the coupler.

