

FSE SERIES



EM POWER
LEADS
THE WAY


ROAD PLANER FOR EXCAVATOR



With the purpose of dismantling asphalt of the road surface, concrete in squares and scraping the rock or simply creating crossings or tracks on paved surfaces. It is produced in 5 models from 20 to 60 cm wide and is suitable for excavators. It can work on high heights, vertical walls, pylons in viaducts.

STRENGTHS

- Vertical, horizontal and oblique milling
- Customized bracket according to the excavator
- Constant milling depth
- Tilting head
- Easy and uncomplicated maintenance

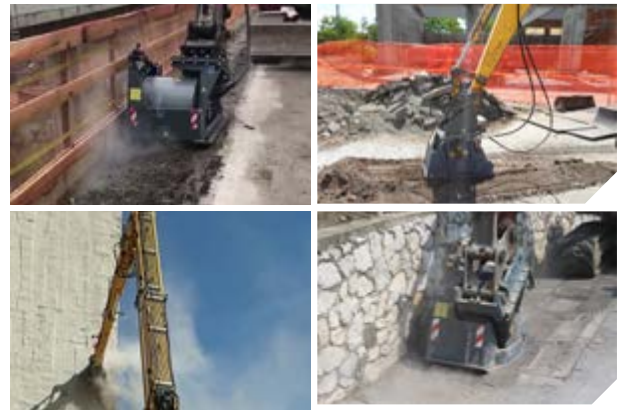

OPTIONAL

- Hydraulic depth adjustment
- Milling drum with different widths and sizes
- Tools for concrete
- Customized upper bracket for operating machine

DATA SHEET		FSE 20.10	FSE 30.15	FSE 35.15	FSE 45.20	FSE 60.23
Milling Width	mm	200	300	350	450	600
Maximum depth	mm	80	120	120	170	200
Weight	kg	180	370	480	720	1150
Asphalt standard teeth	n.	22	32	37	47	62
Oil flow	l/min	20/40	30/60	30/60	80/140	100/160
Pressure	bar	200/100	250/150	250/150	300/150	300/150
Min. distance from wall	mm	40	40	40	60	70
Depth adjustment		Mechanic as standard / Hydraulic as optional				
Excavator	ton	≥ 1,5 < 3	≥ 3 < 5	≥ 5 < 7	≥ 7 < 13	≥ 13 ≤ 25
Dimensions	w x d x H	600 x 1000 x H 750	700 x 1000 x H 750	750 x 1000 x H 750	900 x 1200 x H 850	1100 x 1250 x H 1000

Weights and dimensions could vary without notice. Weight does not include the coupler.



Canalization / Subsoil



Demolitions



Construction industry



Tunnel / Closed spaces



Agricultural / Forest maintenance



Recycling



Quarries / Mines



Streets